



# CONVECTOR HEATERS

BUILT-IN | FLOOR-STAND | WALL-MOUNTED




# BUILT-IN CONVECTORS

**TECHNO** POWER USUAL VENT POWER VENT AIR WD




TECHNO POWER

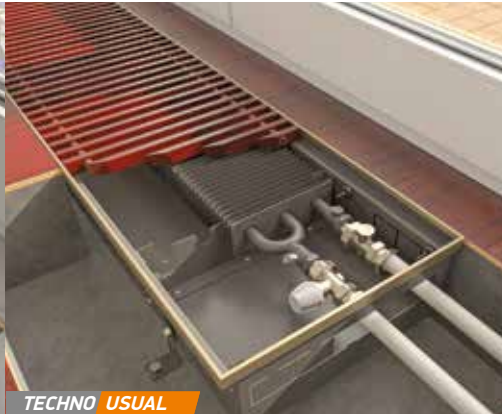

TECHNO USUAL



TECHNO VENT

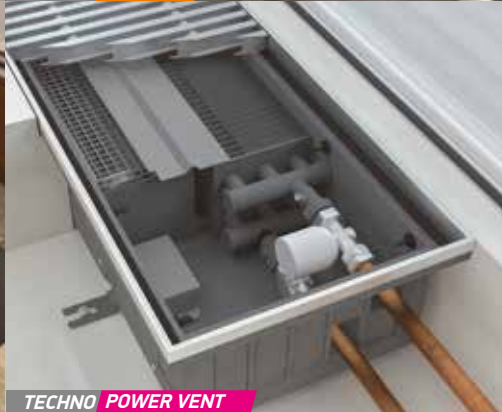

TECHNO POWER VENT



TECHNO AIR



TECHNO WD

## CASING DIMENSIONS

### TECHNO POWER

WITH NATURAL CONVECTION

width, mm	<b>B</b>	150	300	
depth, mm	<b>H</b>	65	85	105

### TECHNO USUAL

WITH NATURAL CONVECTION

width, mm	<b>B</b>	200	250	350	420	
depth, mm	<b>H</b>	65	85	105	120	140

### TECHNO VENT

WITH FORCED CONVECTION

width, mm	<b>B</b>	250	350	420	
depth, mm	<b>H</b>	85	105	120	140

### TECHNO POWER VENT

WITH FORCED CONVECTION OF INCREASED CAPACITY

width, mm	<b>B</b>	250	270
depth, mm	<b>H</b>	75	130

### TECHNO AIR

WITH NATURAL CONVECTION  
AND INDUCED AIR SUPPLY FROM VENTILATION

width, mm	<b>B</b>	250	350	420	
depth, mm	<b>H</b>	85	105	120	140

### TECHNO WD

FOR ROOMS WITH HIGH HUMIDITY\*

width, mm	<b>B</b>	150	200	250	300	350	420
depth, mm	<b>H</b>	85	105	120	140		

\* All the product lines of built-in convectors can be produced in WD series.

Standard length for built-in convectors with natural convection is from 600 to 4800 mm, for convectors with forced convection – from 800 to 4800 mm.

## OPERATING PARAMETERS

Heat transfer agent service pressure bar	$P_{\text{th}}^{\text{max}}$	16
--	------------------------------	----

Hydraulic pressure-test bar	$P_{\text{th}}^{\text{max}}$	40
-----------------------------	------------------------------	----

Maximum service temperature of the heat transfer agent °C	$t_{\text{th}}^{\text{max}}$	130
---	------------------------------	-----

Heat transfer agent type - water or glycol	Aqua	Glycol
--	------	--------



FLOOR-STANDING CONVECTORS  
**TECHNO VITA**



TECHNO VITA



TECHNO VITA



TECHNO VITA WOOD

TECHNO VITA BENCH


CASING DIMENSIONS

**TECHNO VITA**

FLOOR-STANDING AND WALL-MOUNTED CONVECTOR WITH NATURAL CONVECTION

length with, mm	<b>L</b>	400	500	600	...	2400
width, mm	<b>B</b>	85	135	185	235	
height, mm	<b>H</b>	80	130	180	250	400

Convectors with hidden in wide legs connection are floor-mounted only.

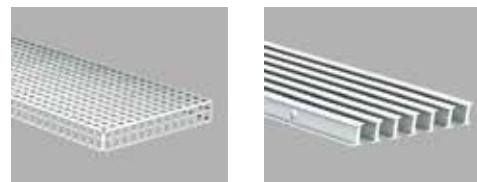

2 types of decorative grilles: perforated steel and longitudinal anodized aluminium grille.

**TECHNO VITA WOOD**

FLOOR-STANDING FINE-WOOD CONVECTOR WITH NATURAL CONVECTION

length with, mm	<b>L</b>	1000	1200	1500
width, mm	<b>B</b>	250		
height, mm	<b>H</b>	230		

**TECHNO VITA BENCH**

BENCH-CONVECTOR WITH NATURAL CONVECTION

length with, mm	<b>L</b>	1000	1200	1400	1600	1800
width, mm	<b>B</b>	300				
height, mm	<b>H</b>	350				

OPERATING PARAMETERS

Heat transfer agent service pressure bar	$P_{h,ser}$	16
--	-------------	----

Hydraulic pressure-test bar	$P_{h,pr}$	40
-----------------------------	------------	----

Maximum service temperature of the heat transfer agent °C	$t_{max}$	130
---	-----------	-----

Heat transfer agent type - water or glycol	Aqua	Glycol
--	------	--------

# WALL-MOUNTED CONVECTORS

## TECHNO BOARD WALL



TECHNO BOARD



TECHNO WALL

### CASING DIMENSIONS

#### TECHNO BOARD

SKIRTING CONVECTOR WITH NATURAL CONVECTION


length with, mm	<b>L</b>	∞
width, mm	<b>B</b>	60
height, mm	<b>H</b>	120

Capacity 600 Watt per 1 running meter.

#### TECHNO WALL

WALL-MOUNTED CONVECTOR WITH NATURAL CONVECTION

length with, mm	<b>L</b>	400	500	600	...	2200
width, mm	<b>B</b>	60	110			
height, mm	<b>H</b>	250	400			



2 types of decorative grilles: perforated steel and longitudinal anodized aluminium grille.

### OPERATING PARAMETERS

Heat transfer agent service pressure bar	<b>P<sub>bar</sub></b>	16
--	------------------------	----

Hydraulic pressure-test bar	<b>P<sub>bar</sub></b>	40
-----------------------------	------------------------	----

Maximum service temperature of the heat transfer agent °C	<b>t<sub>max</sub></b>	130
---	------------------------	-----

Heat transfer agent type - water or glycol	<b>Aqua</b>	<b>Glycol</b>
--	-------------	---------------

## DECORATIVE GRILLES FOR BUILT-IN CONVECTORS **TECHNO**

We offer decorative grilles made of anodized aluminium and finewood. Aluminium grilles are available in 7 standart colors: silver, gold, bronze, cognac, white (RAL 9016), brown (RAL 8017), black (RAL 9005) or any color from RAL palette. Wooden grille made of hard finewood is available in 2 colors – light-wood and dark-wood.

**LONGITUDINAL AND ROLL-UP GRILLE OF ANY COLOR ACCORDING TO RAL CAN BE MANUFACTURED UPON REQUEST.**




Longitudinal grille



Roll-up grille



SILVER



GOLD



BRONZE




COGNAC



WHITE (RAL 9016)



BROWN (RAL 8017)



BLACK (RAL 9005)



LIGHT-WOOD



DARK-WOOD

## TEMPERATURE CONTROL **TECHNO**

### FAN CONTROL UNITS, THERMOSTATS .

3 models of regulating unit and 3 models of thermostat to control fan speed and room temperature are available as a complementary option to forced-convection convectors.



BRT-90 UNIT  
12 V FAN



BT-500 UNIT  
220 V FAN



BT-1000 UNIT  
220 V FAN



TECHNO  
KT-200



TECHNO  
KT-300



SIEMENS  
RDF 310.2



TECHNO © 2021



Malysheva street 11  
Velikie Luki  
Pskov region | Russia



[info@techno60.ru](mailto:info@techno60.ru)



+7 81153 6-92-91  
+7 911 364-62-04



[www.techno60.ru](http://www.techno60.ru)